

AD 713702

Admittance, Isolation, and Radiation Patterns  
of Rectangular Slot Antennas in the Presence  
of a Simulated Reentry Sheath

Prepared by G. E. STEWART and K. E. GOLDEN  
Plasma Research Laboratory

70 JUL 01

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
Springfield, Va 22151

Laboratory Operations  
THE AEROSPACE CORPORATION

Prepared for SPACE AND MISSILE SYSTEMS ORGANIZATION  
AIR FORCE SYSTEMS COMMAND  
LOS ANGELES AIR FORCE STATION  
Los Angeles, California

THIS DOCUMENT HAS BEEN APPROVED FOR PUBLIC  
RELEASE AND SALE; ITS DISTRIBUTION IS UNLIMITED

ADDC  
RECEIVED  
OCT 6 1970  
C

34

Air Force Report No.  
SAMSO-TR-70-308

Aerospace Report No.  
TR-0059(6220-10)-2

ADMITTANCE, ISOLATION, AND RADIATION PATTERNS OF  
RECTANGULAR SLOT ANTENNAS IN THE PRESENCE  
OF A SIMULATED REENTRY SHEATH

Prepared by

G. E. Stewart and K. E. Golden  
Plasma Research Laboratory

70 JUL 01

~~Details of illustrations in~~  
~~this document may be better~~  
~~studied on microfiche~~

Laboratory Operations  
THE AEROSPACE CORPORATION

Prepared for

SPACE AND MISSILE SYSTEMS ORGANIZATION  
AIR FORCE SYSTEMS COMMAND  
LOS ANGELES AIR FORCE STATION  
Los Angeles, California


This document has been approved for public  
release and sale; its distribution is unlimited

## FOREWORD

This report is published by The Aerospace Corporation, El Segundo, California, under Air Force Contract F04701-70-C-0059.

This report, which documents research carried out from July 1969 through January 1970, was submitted 29 July 1970 to Lieutenant Edward M. Williams, Jr., SMTAE, for review and approval.

Approved



---

R. X. Meyer, Director  
Plasma Research Laboratory

Publication of this report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.



---

Edward M. Williams, Jr.  
1st Lt., United States Air Force  
Project Officer

## ABSTRACT

The admittance, isolation, and element radiation patterns of reduced-height rectangular slot antennas in a plasma-clad ground plane have been measured and are compared with theoretical predictions. The plasma sheath simulates the electromagnetic properties of a high-altitude boundary layer and is produced by pulsed electron beam emission from the ground plane in the presence of a low-pressure gas.

## CONTENTS

|   |     |
|---|-----|
| FOREWORD . . . . .  | ii  |
| ABSTRACT . . . . .  | iii |
| I. INTRODUCTION . . . . .   | 1   |
| II. EVACUABLE MICROWAVE ANECHOIC<br>CHAMBER . . . . .             | 3   |
| III. ADMITTANCE, ISOLATION, AND PATTERN<br>CALCULATIONS . . . . . | 7   |
| IV. EXPERIMENTAL RESULTS . . . . .                                | 9   |
| V. CONCLUSIONS . . . . .  | 13  |
| REFERENCES . . . . .  | 15  |

## FIGURES

|   |    |
|---|----|
| 1. Evacuatable Microwave Anechoic Chamber and<br>Associated Microwave Equipment . . . . .                             | 4  |
| 2. Plasma-Clad Ground Plane with Rectangular<br>Slots in Anechoic Chamber . . . . .                                   | 5  |
| 3(a). Normalized Electron Density Profile . . . . .   | 8  |
| 3(b). Peak Electron Density as a Function of<br>Discharge Current . . . . .   | 8  |
| 4. Measured and Calculated Radiation Patterns . . . . .   | 10 |
| 5. Measured and Calculated Aperture Admittance . . . . .  | 11 |
| 6. Increase in Slot Antenna Isolation and Broadside<br>Signal Attenuation as a Function of Electron Density . . . . . | 12 |

## I. INTRODUCTION

The design of antenna systems for operation in the presence of a reentry sheath has long been hampered by the lack of a means of simulating the sheath in the laboratory. For sharp, slender reentry bodies at low altitudes and low signal frequencies, the plasma sheath is thin and collision-dominated. Under these conditions, space cloth can be used for sheath simulation (Ref. 1). At high altitudes, collision frequencies are low, and the boundary layer may be thick enough to produce a significant change in mutual admittance and radiation pattern distortion. In this regime, the boundary-layer plasma can be simulated with a pulsed abnormal glow discharge (Ref. 2). This plasma is produced over a conducting body by insulated electrodes inserted into the surface and excited at a 500-Hz repetition rate with kilovolt pulses. Although this technique is applicable to a variety of shapes, initial work has been focused on measurements for rectangular slots on a plasma-clad ground plane. Theoretical prediction techniques exist for admittance, isolation, and radiation patterns for this configuration (Refs. 3 - 5).

## II. EVACUABLE MICROWAVE ANECHOIC CHAMBER

To produce the plasma layer, it is necessary to provide a low-pressure environment of 0.1 to 0.5 Torr of argon. Since the linear interaction of high-frequency electromagnetic waves with a cold plasma depends only on the electron density distribution and the collision frequency, it is immaterial whether the neutral gas is air or argon. The discharge used requires no confining walls but only a low-pressure gas environment. In order to realize the full potential of this simulation technique, we constructed a conical evacuable microwave anechoic chamber. With absorber in place, the tank can be evacuated to  $<1$  mTorr and has an X-band reflectivity of -50 dB. The chamber and microwave recording equipment are shown in Fig. 1. In Fig. 2, a plasma-clad ground plane with a pair of rectangular slots is shown in the chamber. The ground plane is extended beyond the plasma layer to minimize edge scattering.

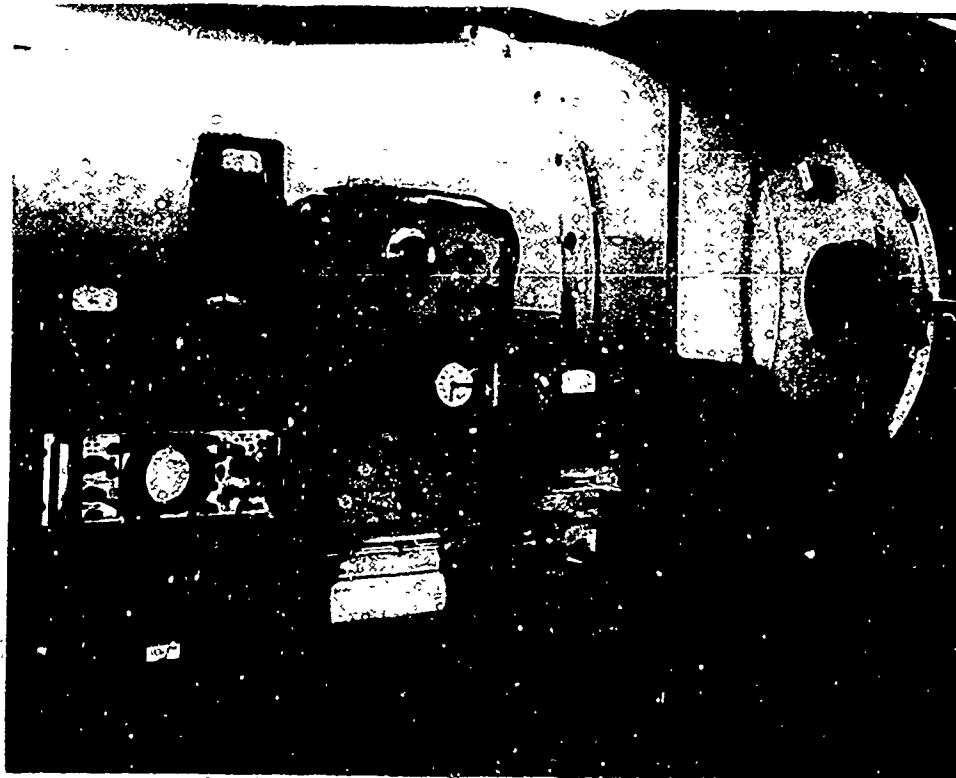


Figure 1. Evacuatable Microwave Anechoic Chamber and Associated Microwave Equipment



Figure 2. Plasma-Clad Ground Plane with Rectangular Slots  
in Anechoic Chamber

### III. ADMITTANCE, ISOLATION, AND PATTERN CALCULATIONS

The plasma layer produced over the ground plane is uniform across the surface but varies in a direction normal to the surface. The shape of the electron density profile at 0.4 Torr of argon is shown in Fig. 3(a), as determined from the ion saturation current measured by Langmuir probes at 10  $\mu$ sec after the termination of the ionization pulse. The peak electron density was determined by matching the measured and the calculated broadside attenuations for constant aperture voltage [Fig. 3(b)]. Computations were performed assuming that the electron density profile of Fig. 3(a) was approximated by a large number of homogeneous slabs using the analyses of Refs. 4 and 5. Because of the low collision frequency, 1000 slabs were necessary to approximate the plasma layer.

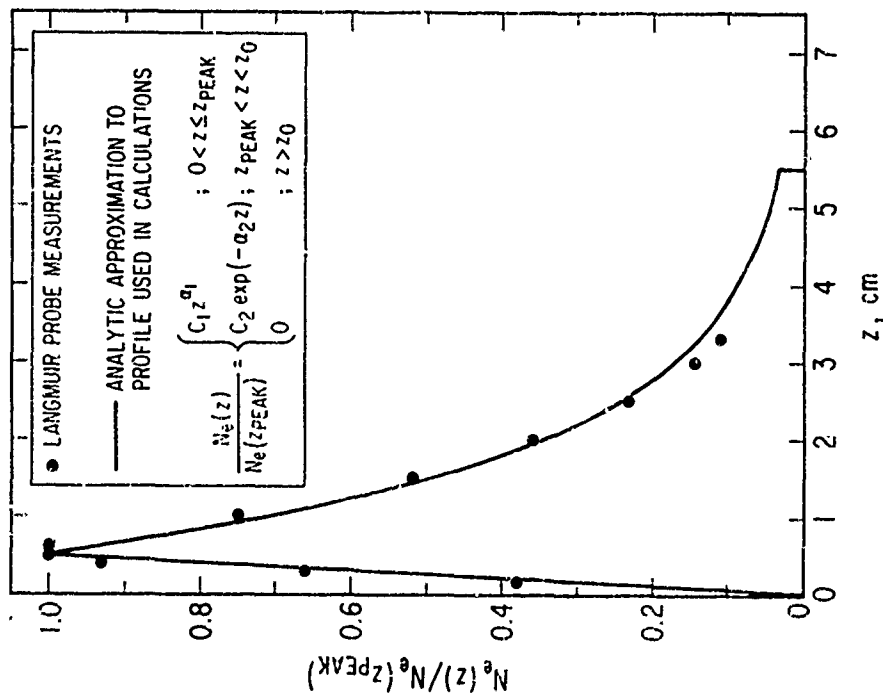


Figure 3(a). Normalized Electron Density Profile

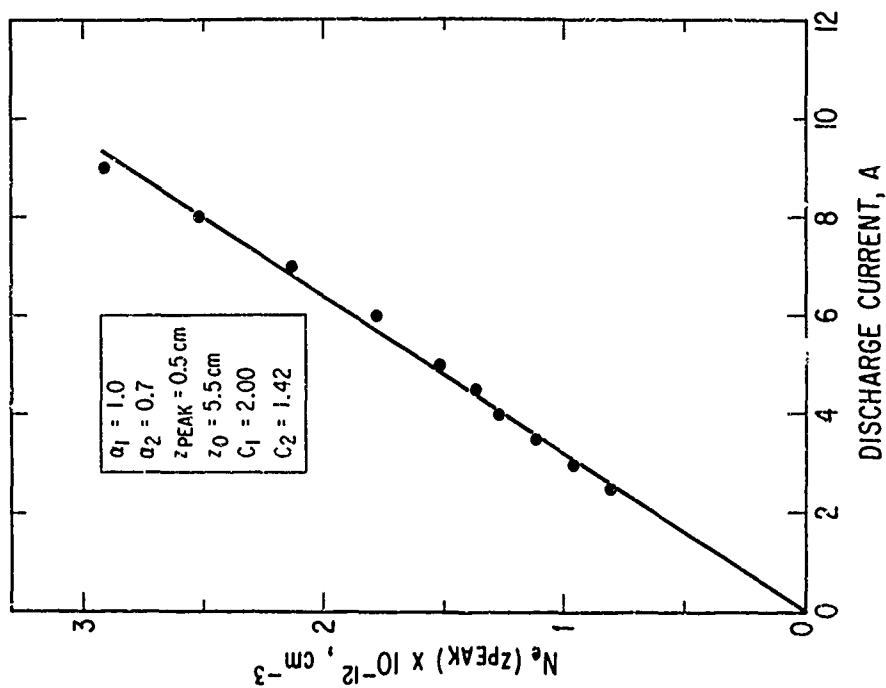


Figure 3(b). Peak Electron Density as a Function of Discharge Current

#### IV. EXPERIMENTAL RESULTS

The measured radiation patterns are compared with the theoretical computations in Fig. 4. The measurements were obtained by holding the aperture voltage constant to correspond to the radiation pattern calculations.

Self-admittance and isolation were measured with the discharge in an evacuable antenna cap to minimize the effects of the waveguide separating the slots from the microwave bridge used for the admittance and isolation measurements. The self-admittance is shown on a Smith chart in Fig. 5 with the slot configuration shown in the inset. The measurements are plotted as a function of discharge current, and the calculations are plotted as a function of peak electron density. The change in E-plane isolation and broadside signal attenuations are displayed in Fig. 6 for the conditions of constant incident power.

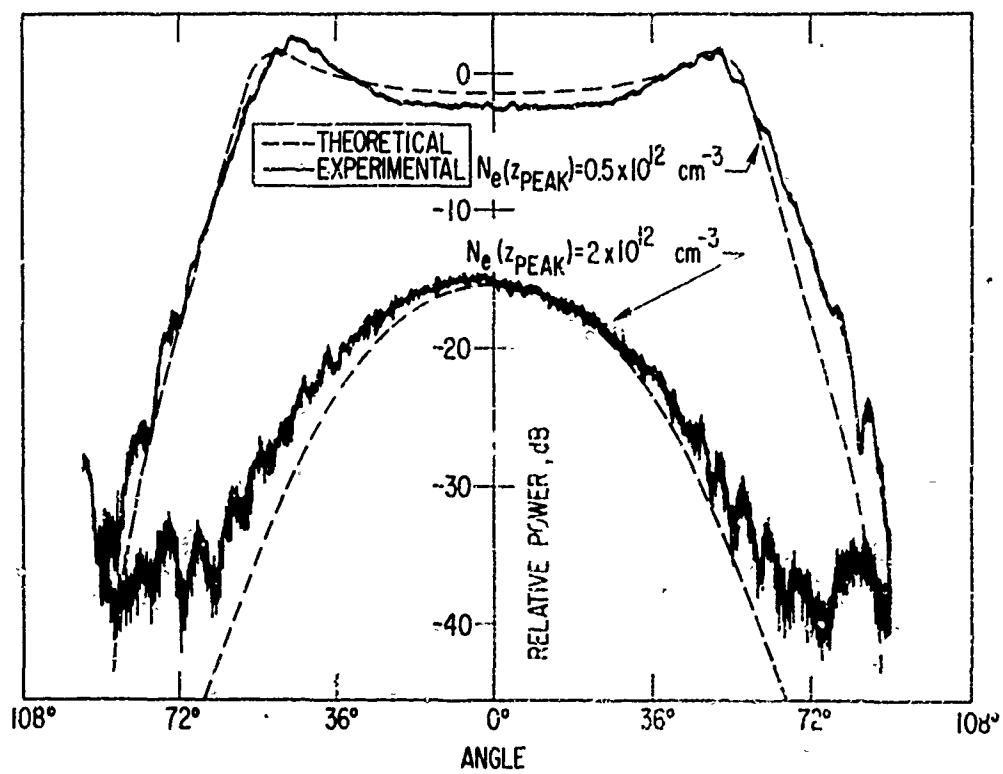


Figure 4. Measured and Calculated Radiation Patterns

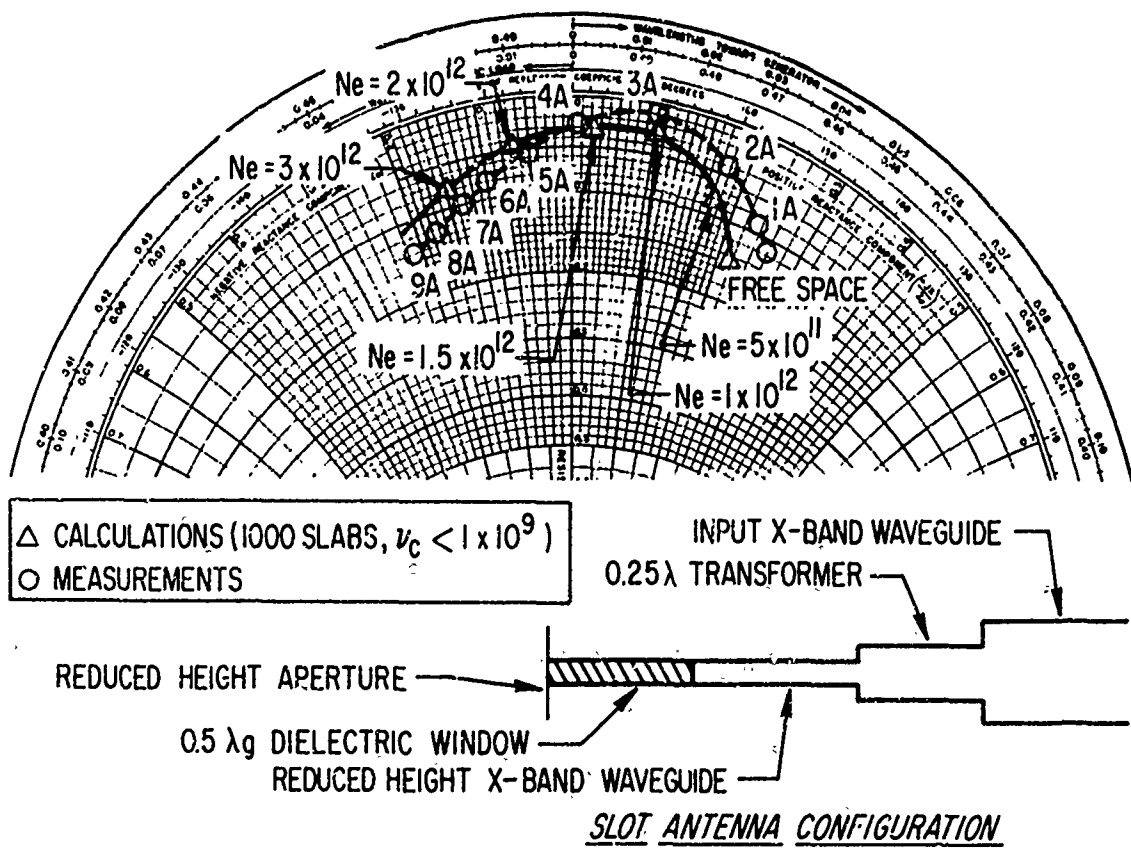


Figure 5. Measured and Calculated Aperture Admittance

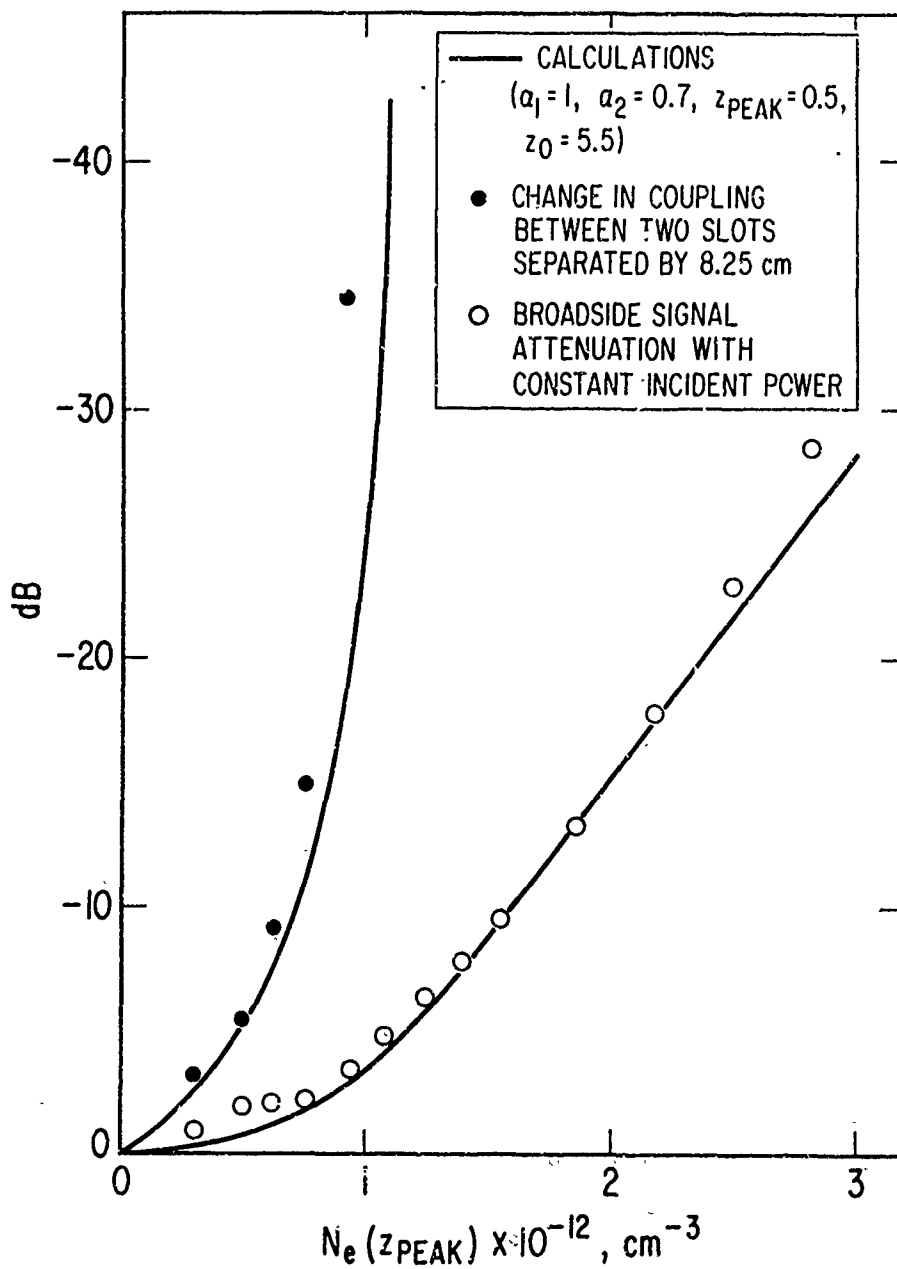


Figure 6. Increase in Slot Antenna Isolation and Broadside Signal Attenuation as a Function of Electron Density

## V. CONCLUSIONS

The admittance, isolation, and radiation patterns of reduced-height rectangular slot antennas in the presence of an inhomogeneous plasma layer have been measured and compared with calculations based on the equivalent dielectric constant for a cold plasma. Theory and experiment are in good quantitative agreement since there are none of the scattering problems encountered when discharges are confined by glass walls.

## REFERENCES

1. K. E. Golden and G. E. Stewart, "Admittance and Isolation of Slot Antennas in the Presence of an Inhomogeneous Plasma Layer, Program and Digest of 1968 G-AP International Symposium (Boston, September 9-11), p. 52.
2. G. E. Stewart, "Laboratory Simulation of Reentry Plasma Sheaths, " IEEE Trans. on Antennas and Propagation, AP-15, 831 (November 1967).
3. W. G. Croswell, W. C. Taylor, C. T. Swift, and C. R. Cockrell, "The Input Admittance of a Rectangular Waveguide-Fed Aperture Under an Inhomogeneous Plasma Theory and Experiment, " IEEE Trans. on Antennas and Propagation, AP-16, 475 (July 1968).
4. K. E. Golden and G. E. Stewart, "Self and Mutual Admittances of Rectangular Slot Antennas in the Presence of an Inhomogeneous Plasma Layer, " IEEE Trans. on Antennas and Propagation, AP-17 (November 1969).

UNCLASSIFIED

Security Classification

| DOCUMENT CONTROL DATA - R & D   |   |  |
|---|---|--|
| (Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)  |   |  |
| 1. ORIGINATING ACTIVITY (Corporate author)  |   | 2a. REPORT SECURITY CLASSIFICATION   |
| The Aerospace Corporation<br>El Segundo, California   |   | Unclassified   |
|   |   | 2b. GROUP  |
| 3. REPORT TITLE   |   |  |
| ADMITTANCE, ISOLATION, AND RADIATION PATTERNS OF RECTANGULAR SLOT ANTENNAS IN THE PRESENCE OF A SIMULATED REENTRY SHEATH  |   |  |
| 4. DESCRIPTIVE NOTES (Type of report and inclusive dates)   |   |  |
| 5. AUTHOR(S) (First name, middle initial, last name)  |   |  |
| Gordon E. Stewart and Kurt E. Golden  |   |  |
| 6. REPORT DATE  | 7a. TOTAL NO. OF PAGES  | 7b. NO. OF REFS  |
| 70 JUL 01   | 16  | 5  |
| 8a. CONTRACT OR GRANT NO.   | 9a. ORIGINATOR'S REPORT NUMBER(S)   |  |
| F04701-70-C-0059  | TR-0059(6220-10)-2  |  |
| b. PROJECT NO.  |   |  |
| c.  | 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) |  |
| d.  | SAMSO-TR-70-308   |  |
| 10. DISTRIBUTION STATEMENT  |   |  |
| This document has been approved for public release and sale; its distribution is unlimited.   |   |  |
| 11. SUPPLEMENTARY NOTES   |   | 12. SPONSORING MILITARY ACTIVITY   |
|   |   | Space and Missile Systems Organization<br>Air Force Systems Command<br>Los Angeles, California |
| 13. ABSTRACT  |   |  |
| <p>The admittance, isolation, and element radiation patterns of reduced-height rectangular slot antennas in a plasma-clad ground plane have been measured and are compared with theoretical predictions. The plasma sheath simulates the electromagnetic properties of a high-altitude boundary layer and is produced by pulsed electron beam emission from the ground plane in the presence of a low-pressure gas.</p> |   |  |

DD FORM 1473  
(IF A CSIMILE)UNCLASSIFIED  
Security Classification

UNCLASSIFIED

Security Classification

14.

KEY WORDS

Antennas

Plasmas

Simulated Reentry Sheaths

Slot Admittance

Slot Isolation

Distribution Statement (Continued)

Abstract (Continued)

UNCLASSIFIED

Security Classification